
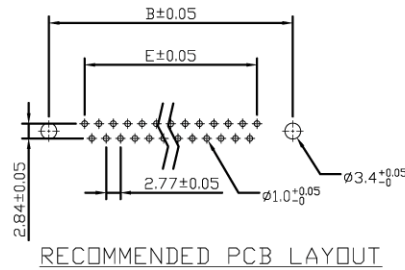


RoHS COMPLIANT

REVISIONS				
REV	ECN NO.	DESCRIPTION	APPROVED BY	DATE
A			MICHAEL HUANG	2009-11-24
B			Xie	2014-07-31

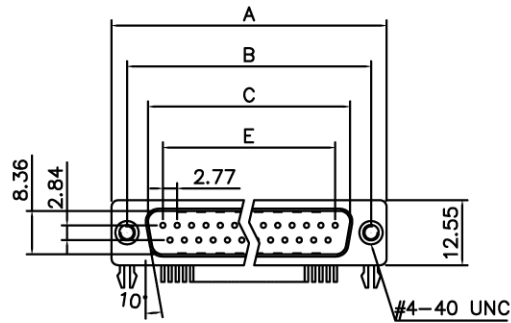

Product Specification

Material

Insulator : Glass-Filled Thermoplastic PBT, UL94V-0

Contact : Copper alloy

Shell : Steel, 100u" Tin Over 50u" min Copper

Clinch Nut : Copper alloy, Nickel Plated.

Boardlock : Steel, Tin Plated.

Electrical

Contact Resistance : 20 milliohms

Insulation Resistance : 1000
megohms at 500 VDC

Dielectric Withstanding Voltage :
1000 VAC/rms 60Hz for 1 minute

Current Rating : 3 AMP

Volatge Rating : 250 VAC/rms 60Hz

ORDER CODE;

DxLxxPDTK1NS-R



Shell size & No positions;

DEL09 - 9 pos

DAL15 - 15 pos

DBL25 - 15 pos

DCL37 - 37 pos

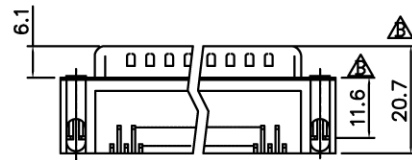

Dimensions

Positions	A	B	C	E
9	30.81	24.99	16.92	11.08
15	39.20	33.30	25.25	19.39
25	53.05	47.04	38.96	33.24
37	69.40	63.50	55.42	49.86

DIMENSIONS: <input type="checkbox"/> MM [INCH] <input type="checkbox"/> INCH [MM] <input checked="" type="checkbox"/> MM ONLY		CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE DRAWN BY AND DATE JAY ZHANG 08-08-13		GTK UK LTD.	
UNLESS OTHERWISE SPECIFIED, GENERAL TOLERANCE: DECIMALS ANGLES .X ±0.38 [0.015] X° ±3° .X ±0.25 [0.010] X° ±1.0° .XX ±0.13 [0.005]		CHECKED BY AND DATE JUSTIN XING 08-08-13 APPROVED BY AND DATE MICHAEL HUANG 08-08-13 THIRD ANGLE PROJECTION			
MATERIAL				DRAWING NO.	
FINISH		SCALE: 1 : 1		DxLxxPDTK1NS-R	
		SIZE: A3		REV	
		FILE NO.:		B	
		SHEET 1 OF 1			

DO NOT SCALE DRAWING