

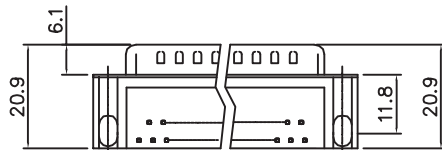
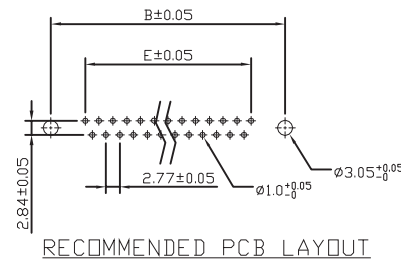


RoHS COMPLIANT

REVISIONS				
REV	ECN NO.	DESCRIPTION	APPROVED BY	DATE
A		▲	MICHAEL HUANG	2009-05-19

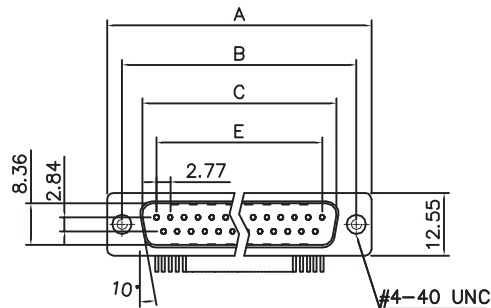

Product Specification

Material

Insulator : Glass-Filled Thermoplastic PBT, UL94V-0
 Contact : Copper alloy
 Shell : Steel, 100u" Nickel Over 60u" min Copper
 Boardlock : Brass, Tin Plated.
 Screwlock : Steel, Nickel Plated.

Electrical

Contact Resistance : 20 milliohms
 Max at 1 AMP DC.
 Insulation Resistance : 1000
 megohms at 500 VDC
 Dielectric Withstanding Voltage :
 1000 VAC/rms 60Hz for 1 minute
 Current Rating : 3 AMP
 Voltage Rating : 250 VAC/rms 60Hz

ORDER CODE;

DxLxxPDTK1OS-R

Shell size & No positions

- DEL09 - 9 pos
- DAL15 - 15 pos
- DBL25 - 15 pos
- DCL37 - 37 pos

Dimensions

Positions	A	B	C	E
9	30.81	24.99	16.92	11.08
15	39.20	33.30	25.25	19.39
25	53.05	47.04	38.96	33.24
37	69.40	63.50	55.42	49.86

DIMENSIONS: <input type="checkbox"/> MM [INCH] <input type="checkbox"/> INCH [mm] <input checked="" type="checkbox"/> MM ONLY	CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE
	DRAWN BY AND DATE JUSTIN XING 05-16-06
UNLESS OTHERWISE SPECIFIED, GENERAL TOLERANCE: DECIMALS ANGLES .X ±0.38 [0.015] X° ±3° .X ±0.25 [0.010] .X° ±1.0° .XX ±0.13 [0.005]	CHECKED BY AND DATE JUSTIN XING 05-16-06 APPROVED BY AND DATE KING CHIU 05-16-06 THIRD ANGLE PROJECTION
MATERIAL	
FINISH	SCALE: 1 : 1 SIZE: A3



TITLE
 R/A D-SUB PLUG WITH 10.3MM
 FOOTPRINT WITH 4-40UNC THREADED
 INSERTS, NO BOARDLOCKS

DRAWING NO. DxLxxPDTK1OS-R	REV A
FILE NO.:	SHEET 1 OF 1

DO NOT SCALE DRAWING