
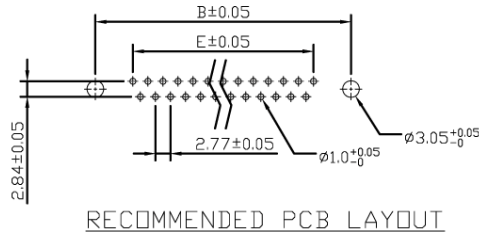


RoHS COMPLIANT

REV.	DESCRIPTION	ECN NO.	DWN.	CHK.	APVD.	DATE
A			Xie	Jack	Franky	2012-07-07

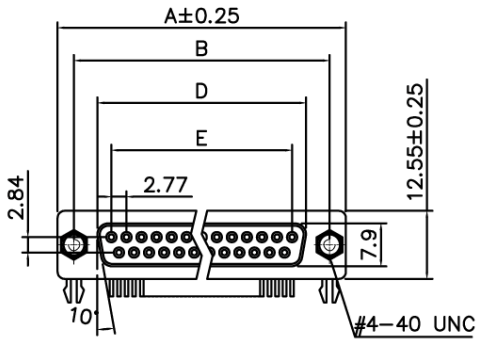



Product Specification

Material

Insulator : Glass-Filled Thermoplastic PBT, UL94V-0
 Contact : Copper alloy
 Shell : Steel, 100u" Tin Over 50u" min Copper
 Boardlock : Steel, Tin Plated.
 Screwlock : Steel, Nickel Plated.

Electrical


Contact Resistance : 20 milliohms
 Max at 1 AMP DC.
 Insulation Resistance : 1000
 megohms at 500 VDC
 Dielectric Withstanding Voltage :
 1000 VAC/rms 60Hz for 1 minute
 Current Rating : 3AMP
 Voltage Rating : 250 VAC/rms 60Hz
 Temperature Range: -20°C ~ 85 °C

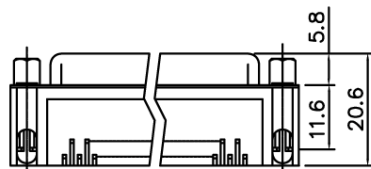

ORDER CODE;

DxLxxSDTK1YS-R

Shell size & No positions
 DEL09 - 9 pos
 DAL15 - 15 pos
 DBL25 - 15 pos
 DCL37 - 37 pos

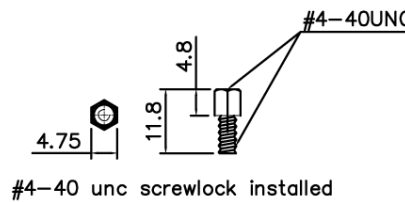

Dimensions

Positions	A	B	D	E
9	30.81	24.99	16.33	11.08
15	39.20	33.30	24.70	19.39
25	53.05	47.04	38.40	33.24
37	69.40	63.50	54.80	49.86

DIMENSIONS: <input type="checkbox"/> mm [INCH] <input type="checkbox"/> INCH [mm] <input checked="" type="checkbox"/> mm ONLY		CAD GENERATED DRAWING, DO NOT MANUALLY UPDATE	
UNLESS OTHERWISE SPECIFIED, GENERAL TOLERANCE: DECIMALS ANGLES X. ±0.38 [0.015] X* ±3° .X ±0.25 [0.010] .X* ±1.0° .XX ±0.13 [0.005]		DRAWN BY AND DATE TIAN 2011-10-14	
MATERIAL:		CHECKED BY AND DATE JACK CHEN 2011-10-14	
FINISH:		APPROVED BY AND DATE FRANKY CHEN 2011-10-14	
		THIRD ANGLE PROJECTION	
		SCALE: 1:1	
		SIZE: A4	

gtk GTK UK LTD.

TITLE
 R/A D-SUB RECEPTACLE;
 10.3MM FOOTPRINT. 4-40UNC FIXED
 SCREWLOCKS & BOARDLOCKS

DRAWING NO. DxLxxSDTK1YS-R	REV A
FILE NO.:	SHEET 1 OF 1

DO NOT SCALE DRAWING