





PCB LAYOUT/TOP VIEW

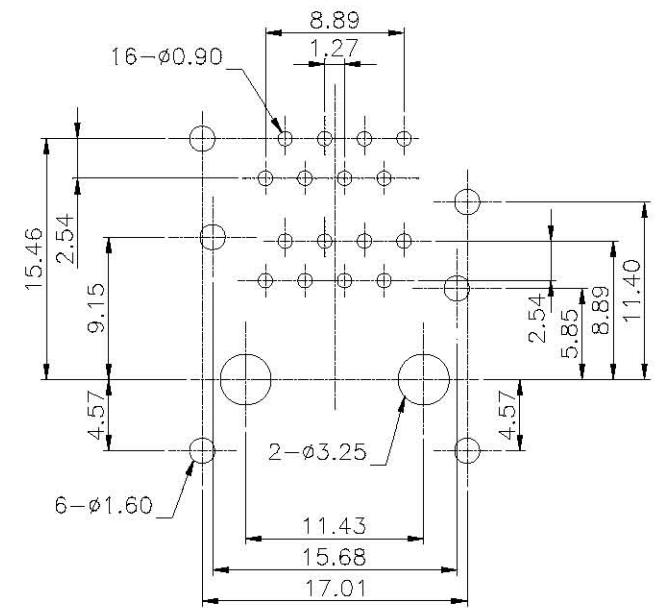


Materials;

- Shield; 0.20mm thickness stainless case, tin plated on ground pin
- Housing; Glass Filled Polyester, UL94V-0. Black
- Contact; Phosphor Bronze, 6u" gold over Nickel in contact area, Tin plated over Nickel in solder area

設計 DR. YANG 93-03-09	核准 APPD. Jerry 93-03-09	容許公差 TOLERANCE .XXX ±0.10 .XX ±0.25 .X ±0.38 X ±0.50 ANG ±3°	品名 Double Level 2*1 port ARTICLE Shielded Jack, 8P8C
版本說明 REVISION NOTE			圖號 MTDG2-8810SB-R DWG NO.
GTK UK LTD.			單位 UNIT mm
			比例 SCALE 3/1
			張數 SHEET 1/2
			版本 REV. A

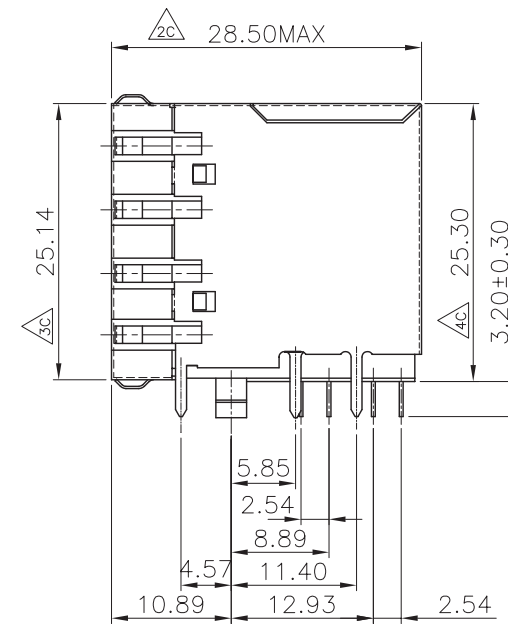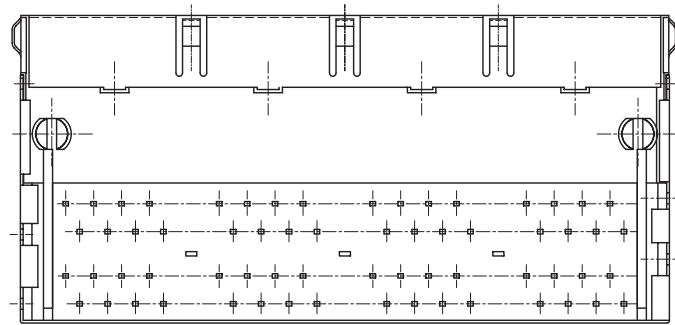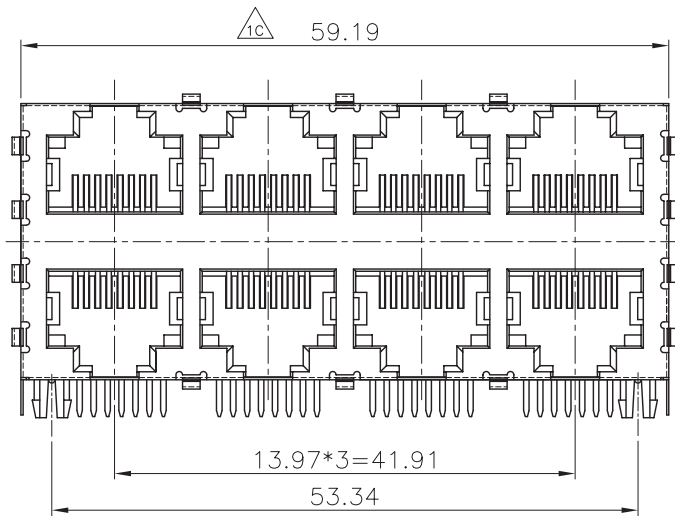

ROHS COMPLIANT

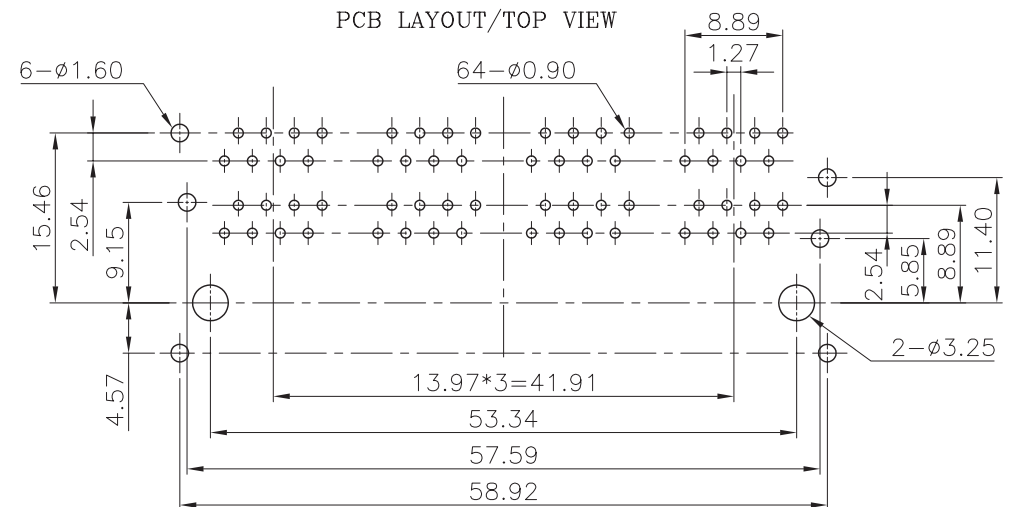

Materials;

Shield; 0.20mm thickness stainless case, tin plated on ground pin
 Housing; Glass Filled Polyester, UL94V-0. Black
 Contact; Phosphor Bronze, 6u" gold over Nickel in contact area,
 Tin plated over Nickel in solder area

修正 REVISION	日期 DATE	容許公差 TOLERANCE	Double Level 2*4Ports		
		.XXX ±0.10	品名	PCB Jacks	
		.XX ±0.25	ARTICLE	(Shielded 8P8C)	
		.X ±0.38	圖號	MTDG8-8810SB-R	
		X ±0.50	DWG NO.		
		核准 APPD.	單位 UNIT	比例 SCALE	張數 SHEET
		校對 CHKD.	mm	2/1	2/2
		設計 DR. Honda			版本 REV. A
		89-03-11			

gtk GTK UK LTD.