


RoHS Compliant



# Engineer Drawing

REV	ECN NO.	DESCRIPTION	DATE	APP'D
C/O		RELEASE TO PRODUCTION	03/17/10	Goldberg





2P





3~16P

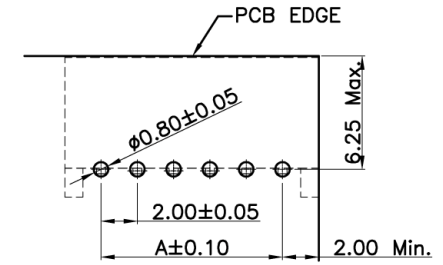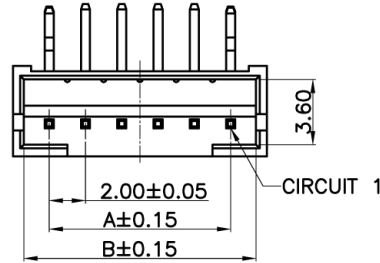

P.C.B. Layout

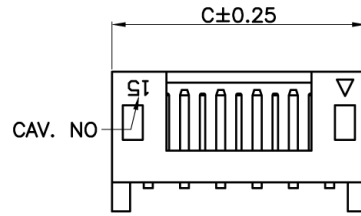

Mating Condition (REF.)





Pin	DIM. (mm)			Pcs/Bag	Pin	DIM. (mm)			Pcs/Bag
	A	B	C			A	B	C	
02	-	4.80	6.00	1,000	10	18.00	20.80	22.00	500
03	4.00	6.80	8.00	1,000	11	20.00	22.80	24.00	500
04	6.00	8.80	10.00	1,000	12	22.00	24.80	26.00	250
05	8.00	10.80	12.00	1,000	13	24.00	26.80	28.00	250
06	10.00	12.80	14.00	500	14	26.00	28.80	30.00	250
07	12.00	14.80	16.00	500	15	28.00	30.80	32.00	250
08	14.00	16.80	18.00	500	16	30.00	32.80	34.00	250
09	16.00	18.80	20.00	500					

NOTES:

1. MATERIAL:  
 INSULATOR (HALOGEN FREE): NYLON 66, UL94V-0 WHITE  
 CONTACT: COPPER ALLOY  
 FINISH: 60μ" TIN PLATED OVER NICKEL

2. ORDER CODE: WTBM-xxS-TH1T-R

No of contacts: 02-16

<b>TOLERANCE</b> X. ±0.30 X.X ±0.25 X.XX ±0.15 X.XXX ±0.08 ANGULA 3° UNLESS OTHERWISE SPECIFIED	<b>APPROVALS</b> DRAWN Vinson Hu CHK'D Goldberg Chen APP'D Wayne Lai		<b>DATE</b> 03/17/10' 03/17/10' 03/17/10'	 <b>GTK UK LTD.</b>		
	<b>PART NO.</b> WTBM-xxS-TH1T-R		<b>TITLE:</b> WIRE TO BOARD, RECEPTACLE, PITCH 2.00mm, RIGHT ANGLE, DIP TYPE, ASSEMBLY			
	<b>UNITS</b> mm		<b>SCALE</b> 1:1	<b>SIZE:</b> A4	 <b>SHEET</b> 1	<b>REV. C/O</b>