

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				
B	增修產品料號	卓欽堂	王盛富	郭豐榮	95.05.19
C	增修產品料號	李玉雲	周玉齡	黃銘傳	95.08.14
D	增修尺寸檢驗重點	Ken	王盛富	郭豐榮	97.11.18
E	增修尺寸檢驗重點	Daniel	王盛富	郭豐榮	98.07.15

SPECIFICATIONS

Current Rating:
3 Amp

Insulator resistance:
5000 Megohms Min.

Contact resistance:
20 m ohms Max.

Dielectric withstanding:
AC 500V/minute


Operating Temperature:
-40° ~ +105° C (NYLON 6T)

Contact Material:
Phosphor Bronze


Insulator Material:
High Temperature Thermoplastic
+Glass Fibre UL94V-0

Color: Black

Finish:
Standard: Gold flash all over

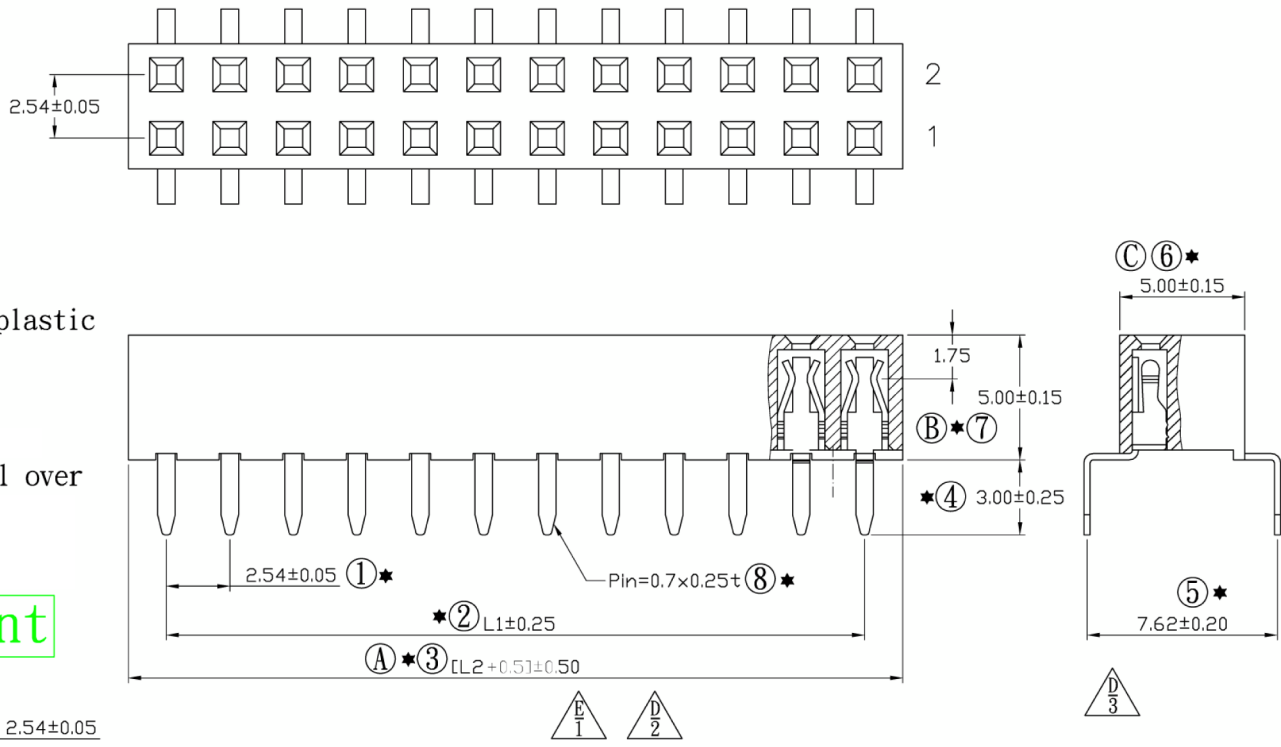

RoHS Compliant

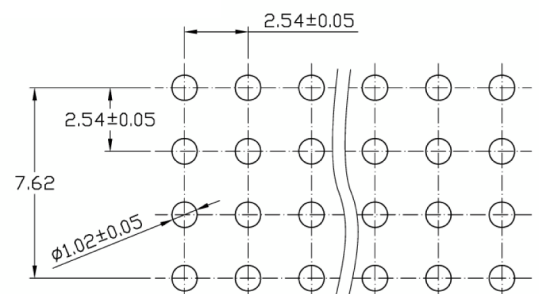

塑膠檢驗重點	尺寸公差
A	[L2+0.5]±0.50
B	5.00±0.15
C	5.00±0.15

成品規格圖				APP.	ANGLES	±3°	SIZE	A4
TITLE	DUAL ENTRY PCB RCPT, 2.54MM			CHK.	LINEAR	0.0 ±0.38	SCALE	1:1
PART NO	FHDSxxG1D-5.0-R					0.00±0.25	SHEET	2 / 2
DRW NO	22P850102			DR.	Ken Wang			
UNIT	mm(INCH)	PROJECT	◎ ◁		95.08.14			

Cir-cuits	Dimension mm	
	L1	L2
2X2	2.54	5.08
2X3	5.08	7.62
2X4	7.62	10.16
2X5	10.16	12.70
2X6	12.70	15.24
2X7	15.24	17.78
2X8	17.78	20.32
2X9	20.32	22.86
2X10	22.86	25.40
2X11	25.40	27.94
2X12	27.94	30.48
2X13	30.48	33.02
2X14	33.02	35.56
2X15	35.56	38.10
2X16	38.10	40.64
2X17	40.64	43.18
2X18	43.18	45.72
2X19	45.72	48.26
2X20	48.26	50.80
2X21	50.80	53.34
2X22	53.34	55.88
2X23	55.88	58.42
2X24	58.42	60.96
2X25	60.96	63.50
2X26	63.50	66.04
2X27	66.04	68.58
2X28	68.58	71.12
2X29	71.12	73.66
2X30	73.66	76.20
2X31	76.20	78.74
2X32	78.74	81.28
2X33	81.28	83.82
2X34	83.82	86.36
2X35	86.36	88.90
2X36	88.90	91.44
2X37	91.44	93.98
2X38	93.98	96.52
2X39	96.52	99.06
2X40	99.06	101.60

