

RCV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				

**SPECIFICATIONS**

Current Rating:  
3 Amp

Insulator resistance:  
5000 Megohms Min.

Dielectric withstanding:  
AC 500V/minute

Operating Temperature:  
-40° ~ +105°C

Contact Material:  
Brass


Insulator Material:  
Standard:P.B.T UL94V-0  
Color: Black

Finish:  
Gold,Tin or Duplex plated

Standard: Gold flash all over


Duplex plated:  
Gold plated on contact area  
Tin on solder area

ROHS COMPLIANT

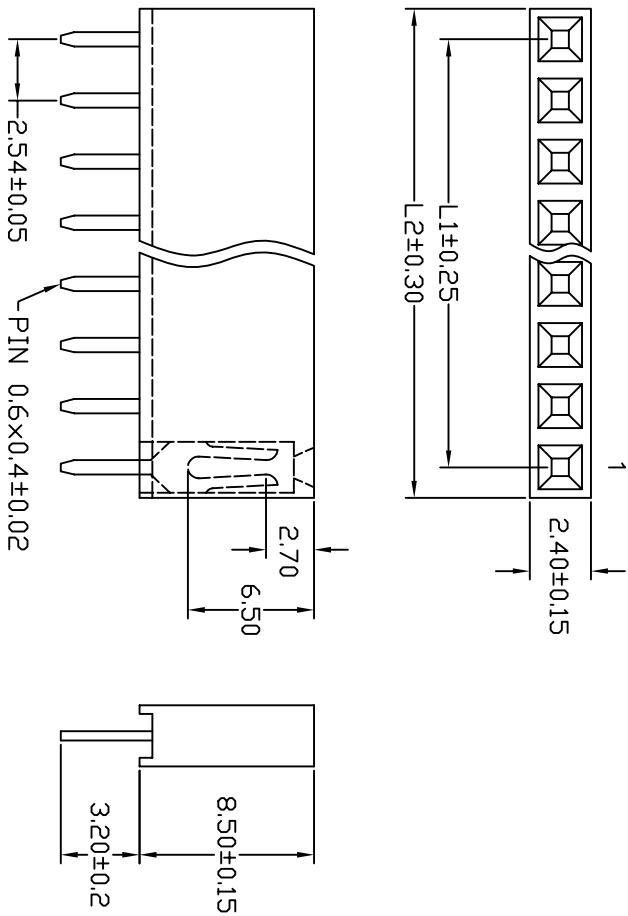

Cir-cuits	Dimension mm	
	L1	L2
2	2.54	5.48
3	5.08	8.02
4	7.62	10.56
5	10.16	13.10
6	12.70	15.64
7	15.24	18.18
8	17.78	20.72
9	20.32	23.26
10	22.86	25.80
11	25.40	28.34
12	27.94	30.88
13	30.48	33.42
14	33.02	35.96
15	35.56	38.50
16	38.10	41.04
17	40.64	43.58
18	43.18	46.12
19	45.72	48.66
20	48.26	51.20
21	50.80	53.74
22	53.34	56.28
23	55.88	58.82
24	58.42	61.36
25	60.96	63.90
26	63.50	66.44
27	66.04	68.98
28	68.58	71.52
29	71.12	74.06
30	73.66	76.60
31	76.20	79.14
32	78.74	81.68
33	81.28	84.22
34	83.82	86.76
35	86.36	89.30
36	88.90	91.84
37	91.44	94.38
38	93.98	96.92
39	96.52	99.46
40	99.06	102.00

<b>TITLE</b>	2.54mm Female Header Straight Type		<b>APP. BY</b>		<b>TOLERANCE UNLESS OTHERWISE SPECIFIED</b>	<b>SIZE:</b>	A4
<b>PART No:</b>	FHSSXXX1-R		<b>CHK. BY</b>		<b>LINEAR</b>	<b>SHEET:</b>	1 / 1
<b>DRW No:</b>	22P850001		<b>DRW. BY</b>	王慧芬			
<b>PROJECT:</b>			<b>UNIT:</b>	mm	<b>SCALE</b>	<b>NOT TO SCALE</b>	<b>COMMENTS:</b>
							成品規格圖

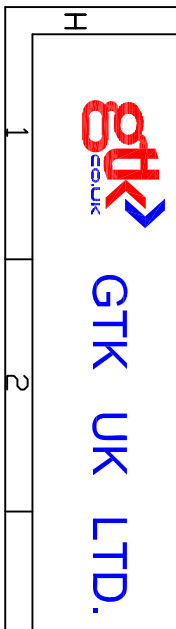

1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---