

REV.	DESCRIPTION	DRW.	CHK.	APP.	DATE
A	RELEASE				
B	增修編碼料號	王日賜	周玉齡	黃銘傳	95.06.22
C	增改圖面尺寸	李玉雲	周玉齡	黃銘傳	95.12.18
D	增修PIN數及L2尺寸	Daniel	王盛富	郭豐榮	98.07.28

SPECIFICATIONS

Current Rating:
2 Amp

Insulator resistance:
1000 Megohms Min.

Contact Resistance:
20 m ohms Max.

Dielectric withstanding:
AC 500V/minute




Operating Temperature:
-40° ~ +105°C

Contact Material:
Phosphor Bronze


Insulator Material:
High Temperature Thermoplastic
+Glass Fibre UL94V-0

Color: Black

Finish:
Standard: Gold flash all over

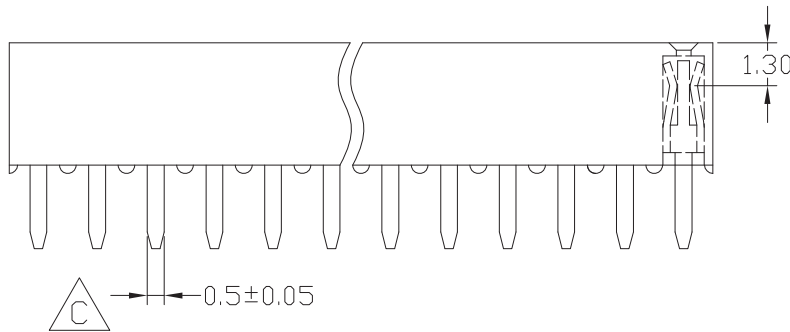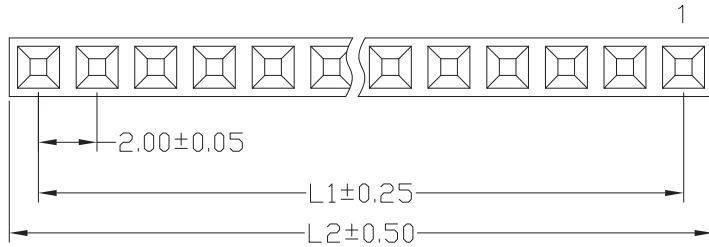

RoHS Compliant

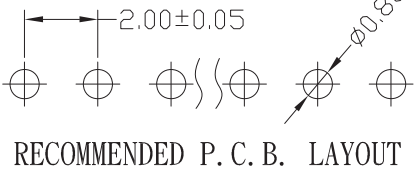

RECOMMENDED P. C. B. LAYOUT



Cir-cuits	Dimension mm	
	L1	L2
2	2.00	4.02
3	4.00	6.02
4	6.00	8.02
5	8.00	10.02
6	10.00	12.04
7	12.00	14.04
8	14.00	16.04
9	16.00	18.06
10	18.00	20.06
11	20.00	22.06
12	22.00	24.06
13	24.00	26.08
14	26.00	28.08
15	28.00	30.08
16	30.00	32.10
17	32.00	34.10
18	34.00	36.10
19	36.00	38.12
20	38.00	40.12
21	40.00	42.82
22	42.00	44.84
23	44.00	46.84
24	46.00	48.84
25	48.00	50.88
26	50.00	52.88
27	52.00	54.88
28	54.00	56.91
29	56.00	58.91
30	58.00	60.91
31	60.00	62.91
32	62.00	64.91
33	64.00	66.91
34	66.00	68.91
35	68.00	70.91
36	70.00	72.91
37	72.00	75.60
38	74.00	77.60
39	76.00	79.60
40	78.00	81.60

成品規格圖				APP.	ANGLES	±3°	SIZE	A4
TITLE	2.00mm Female Header Straight Type			CHK.	LINEAR	0.0 ±0.38	SCALE	3:1
PART NO	FHSSXXG2-R					0.00±0.25	SHEET	1/1
DRW NO	FHSSXXG2-R			DR.	古惠如			
UNIT	mm(INCH)	PROJECT	◎ ◻		94.09.16			

