


RCV. DESCRIPTION	DRW. CHK.	APP. DATE
A RELEASE		

SPECIFICATIONS

Current Rating: 3 Amp
 Insulator resistance: 5000 Megohms Min.
 Dielectric withstanding: AC 500V/minute
 Operating Temperature: -40° ~ +105°C
 Contact Material: Brass
 Insulator Material: Polyester UL94V-0
 Color: Black
 Finish: Gold, Tin or Duplex plated
 Duplex plated: Gold plated on contact area
 Tin on solder area

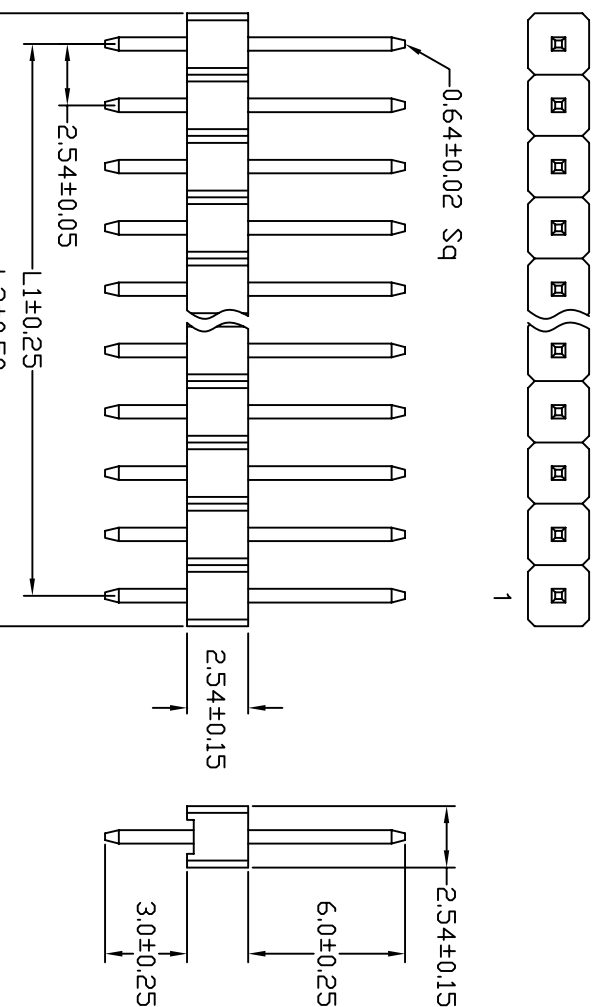

Recommended
 P.C.Board
 Hole Layout
 $\phi 1.02 \pm 0.05$

Dimensional Information:

Cir-cuts	Dimension mm	
	L1	L2
1	2.54	2.54
2	5.08	5.08
3	7.62	7.62
4	10.16	10.16
5	12.70	12.70
6	15.24	15.24
7	17.78	17.78
8	20.32	20.32
9	22.86	22.86
10	25.40	25.40
11	27.94	27.94
12	30.48	30.48
13	33.02	33.02
14	35.56	35.56
15	38.10	38.10
16	40.64	40.64
17	43.18	43.18
18	45.72	45.72
19	48.26	48.26
20	50.80	50.80
21	53.34	53.34
22	55.88	55.88
23	58.42	58.42
24	60.96	60.96
25	63.50	63.50
26	66.04	66.04
27	68.58	68.58
28	71.12	71.12
29	73.66	73.66
30	76.20	76.20
31	78.74	78.74
32	81.28	81.28
33	83.82	83.82
34	86.36	86.36
35	88.90	88.90
36	91.44	91.44
37	93.98	93.98
38	96.52	96.52
39	99.06	99.06
40	101.60	101.60

TITLE	2.54mm Pin Header Straight Type	APP. BY		TOLERANCE UNLESS OTHERWISE SPECIFIED	SIZE:	A4
PART No:	PHSSXXX1-R	CHK. BY		LINEAR	SHEET:	1/1
DRW No:	12640001	DRW. BY	王慧芬	ANGLES	COMMENTS:	成品規格圖
PROJECT:		UNIT:	mm	SCALE		
				NOT TO SCALE		



ROHS COMPLIANT