


REV	ZONE	REVISION	DATE

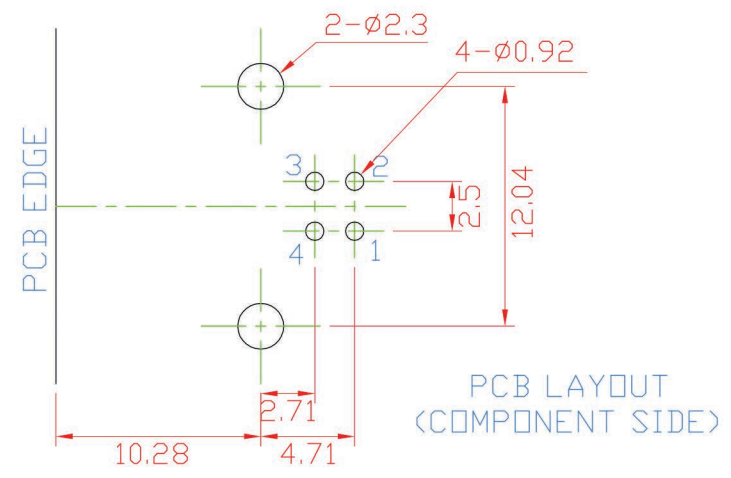

**Specification:**  
**Contact Resistance: 30m Ohm Max.**  
**Insulation Resistance: 1000M Ohm Min. At 500VDC.**  
**Rated Voltage And Current: 1.5A At 250VAC Minimum.**  
**Dielectric Withstanding Voltage: 750V AC (rms) for 1 Minute (Rev. 1.1)**  
**Durability (Life Test): 1500 Cycles**  
**Insertion Force: 35 Newton Maximum.**  
**Extraction Force: 10 Newton Minimum.**

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	HOUSING	PBT G.F.	BLACK	1	
2	TERMINAL	PHOS. BRONZE T:0.25	GOLD/TIN PLATED	4	Gold:1~3u"; NI:40~60u"; TIN:120u" (100% pure Tin of lead free plating)
3	SHELL	BRASS T:0.3	NICKEL PLATED	1	Ni:80~120u"
4	SPRING SHIELD	STAINLESS	THK:0.1	1	

ROHS COMPLIANT



MODEL			COMPUTER NO.			UNIT	SCALE	PART NAME	
PAGE 1 OF 1			APPD.	CKD.	DWG.	mm	1:1	USB B TYPE FLAT 4 PIN DIP	
					TINA	DATE	TOLERANCE	PART NO.	REV.
						25-05-10	X. ±0.38 .X ±0.25 .XX ±0.13 .XXX ±0.05	USBS-BT1-G-R	A0