

REV.	SPECIFICATION	ECN NO.	APPD.

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy, selective gold plated

Cable: 1.00mm(0.039") pitch flat cable.

Electrical Characteristics:

Current Rating: 1 AMP.

Dielectric Withstanding Voltage: AC 500V.








Insulator Resistance: 1000MΩ min. at DC 500V.

Contact Resistance: 30mΩ max. at DC 100mA.

Operating Temperature: -40°C~+105°C.

***RoHS Compliant**

Position	Dimension	
	A	B
10	15.25	8.00
12	17.25	10.00
14	19.25	12.00
16	21.25	14.00
18	23.25	16.00
20	25.25	18.00
22	27.25	20.00
24	29.25	22.00
26	31.25	24.00
30	35.25	28.00
34	39.25	32.00
40	45.25	38.00
44	49.25	42.00
50	55.25	48.00

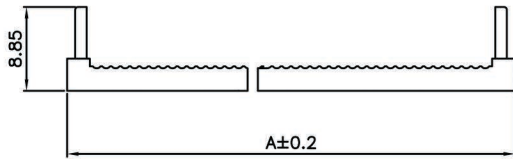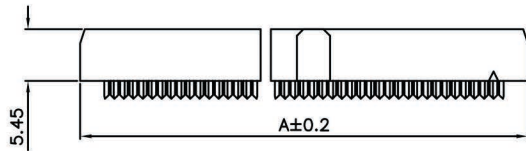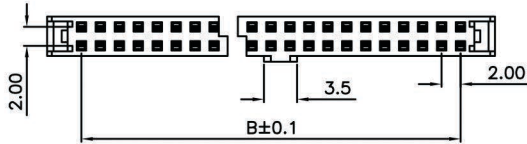

Tolerances	Dwg. No.	1101D02002
x = ±0.5	Projection	
.x = ±0.30	Unit	mm
.xx = ±0.20	Drawn By	Peggy06/18'13

Title:
IDC Socket 2.0mmx2.0mm
with strain relief



P/N:	SCxxTA6-R		
SHEET	1/1	Ver.No.	A2